


**TRANSFORMER BASE
BOTTOM VIEW**

N.T.S.

**TRANSFORMER BASE
TOP VIEW**

N.T.S.

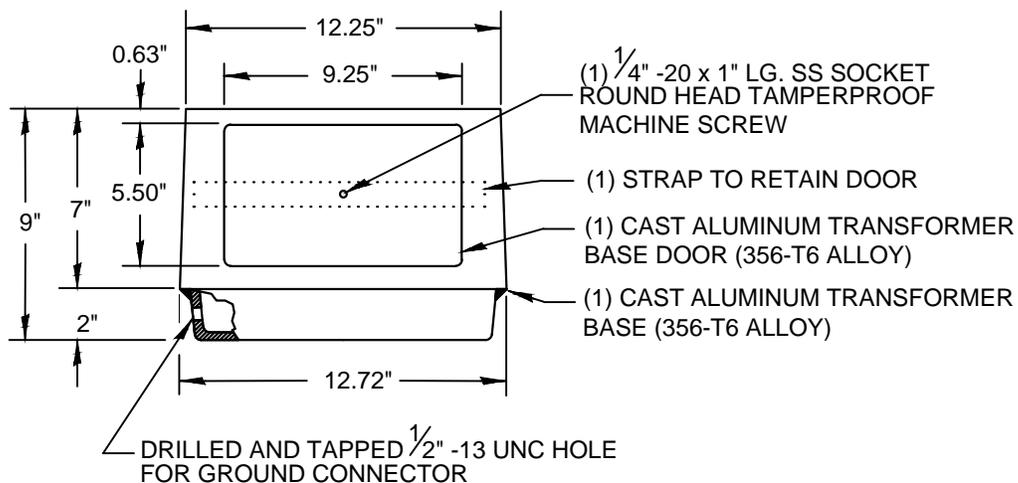

BREAKAWAY TRANSFORMER BASE DETAILS

N.T.S.

NOTES:

1. BEFORE INSTALLATION OF BREAKAWAY BASE, INSTALLER SHOULD CONSULT WITH AUTHORIZED DISTRIBUTOR REGARDING USERS PROPOSED APPLICATION, LOAD REQUIREMENTS AND INSTALLATION METHODS. FAILURES CAN RESULT FROM USERS MISAPPLICATION OR IMPROPER INSTALLATION. TO APPROACH OPTIMUM STATIC LOADS, USE THE LARGEST POSSIBLE BOLT CIRCLES AND USE STEEL WASHER SIZES SPECIFIED BELOW. FOR 12" DIA. TOP & BOT.

BOLT CIRCLES USE 2 3/4" DIA. x 1/2" TK. WASHER. TORQUE GROUND MOUNTING NUTS TO 150 FT.-LBS. SHIMS SHALL NOT BE USED.

2. SHALL BE MODEL #TB6-9 AS MANUFACTURED BY AKRON FOUNDRY.

VILLAGE OF NEW LENOX
STANDARD DETAIL
FOR
BREAKAWAY BASE

REV:	1
DATE:	JANUARY 2018
FILE:	TRANS\BREAKBASE